

PATENT ABSTRACTS OF JAPAN

(11)Publication number : 09-070454
 (43)Date of publication of application : 18.03.1997

(51)Int.CI.

A63B 53/02
 A63B 53/04

(21)Application number : 07-230145

(71)Applicant : YOKOHAMA RUBBER CO LTD:THE

(22)Date of filing : 07.09.1995


(72)Inventor : HORIBA TOSHIHIRO

(54) GOLF CLUB HEAD AND ITS PRODUCTION

(57)Abstract:

PROBLEM TO BE SOLVED: To prevent the occurrence of defective articles, such as sounding after production, and to previously facilitate the easier workability and assembly workability of a club head by effectively preventing the intrusion of foreign matter into the hollow part of the club head.

SOLUTION: The inside wall surface at the deep end of a shaft insertion hole 5 or near this end is projectingly provided horizontally with a collared stopper part 6 toward the central side of this shaft insertion hole 5. The shaft insertion hole 5 is internally provided with a plughole member 7 which has the diameter approximately equal to the diameter (d) of the shaft insertion hole 5 and comes into contact with this collared stopper part 6. The through hole 6a formed in the central part of the collared stopper part 6 is closed by this hole plug member 7.

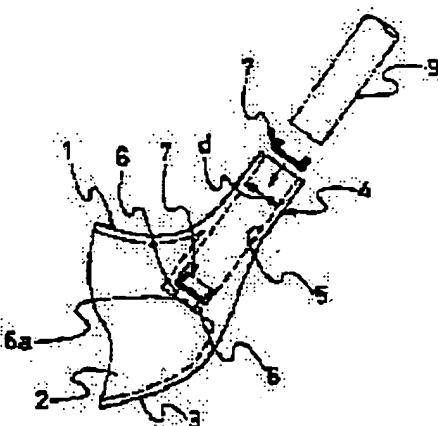

LEGAL STATUS

[Date of request for examination]

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision of rejection]

[Date of requesting appeal against examiner's decision of rejection]

[Date of extinction of right]